



blaugelb Assembly bracket

For the horizontal attachment of full-length elements.

- ETB guideline: 1985 and DIN 4103-1:2015 in ensemble
- Slots for fixing and alignment
- Perforated hole pattern in both 8.0 mm and 10.5 mm for a variable floor structure of 40 – 360 mm
- Static rated resistances to suction/pressure

Product features:

The attachment of window elements is subject to stringent requirements with regard to the transmission of forces from wind loads, dead weights of the construction elements and useful loads to special loads. It must be possible to statically measure the connections of the fixing and connecting means to be used in respect of the building's specific requirements. See "RAL LZM chap. 5" (as at 03/2014). This requirement under the recognised state of the art also applies for blaugelb Assembly brackets in their many different applications.

Applications:

- Force-transmitting attachment facing inwards
- Force-transmitting attachment facing outwards
- Transmission of vertical and horizontal forces in the window plane
- Transmission of horizontal forces perpendicular to the window plane
- Secure element attachment in new buildings and renovations

Note: Linked profiles (e.g. upper/lower window frame extensions) have the static effect of a joint. To counteract this, a load-bearing "counter bearing" must be created when mounting. See also the requirements under "RAL LZM chap. 5" and mounting instructions provided by window profile system and roller blind suppliers.

Product benefits:


- Various hole diameters for receiving screw/dowel systems in a variety of anchor bases/solid wall materials
- Offset hole pattern gives high flexibility for attachment points in construction elements/building structures
- End-to-end configuration of the hole pattern allows the required edge distances of the screw fasteners in the wall material to be observed at all times
- Slots for adjusting the connecting means in two planes and for accommodating structural tolerances
- High corrosion protection
- Extensive test series permit static measurement serving as evidence of anchoring
- Brackets are available with various shank lengths, allowing a wide spectrum of use
- Brackets can be used on both sides to suit the particular construction situation
- Factory profiling of the brackets allows high force absorption and resistance to deformation
- Adjust easily and fasten securely
- Secure fastening, even with high element weights
- Tested for fastening of fall arrester elements
- Offset hole pattern in both 8.0 mm and 10.5 mm, ensuring that the screw connection does not meet the steel reinforcement
- Slots for fixing and alignment
- Slots for fixing and alignment in vertical and horizontal direction
- Easy to mould the sealing sheets

Tested characteristics:

- ETB guideline: 1985 and DIN 4103-1: 2015 in ensemble
 - blaugelb Plinth Thermal Insulation Profiles IHP/EPS
 - blaugelb Plinth Thermal Insulation Profiles PVC/EPS
 - blaugelb Plinth Thermal Insulation Profiles EPS
 - blaugelb Assembly bracket
 - blaugelb Frame screw Fix FK-T30
 - full-length element installation situation – window frame wood, PVC, aluminium
 - full-length element installation situation – threshold systems
 - full-length element installation situation – lifting/sliding door systems
- Horizontal load introduction
- Static rated resistances to suction/pressure

Technical data:

| | |
|--------------------------------------|----------------------------|
| Material: | cold-rolled DC01-A-m |
| Surface: | galvanised |
| Material thickness: | 2 mm |
| Total thickness of assembly bracket: | 10.8 mm |
| Lengths: | 40, 80, 156.5, 200, 240 mm |
| Packing unit: | 25, 40, 50 or 100 pieces |

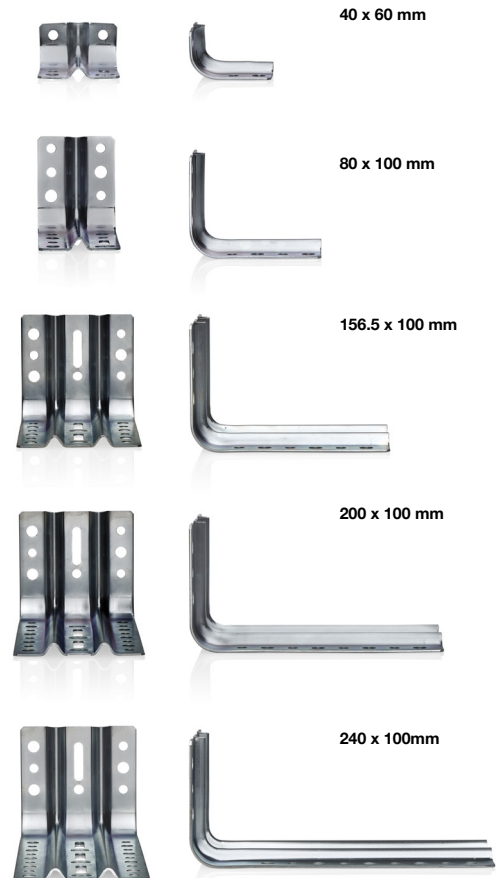


| Product name | PU | Item no. |
|---|-----------|----------|
| blaugelb Assembly bracket 40 x 60 mm | 100 piece | 9068972 |
| blaugelb Assembly bracket 80 x 100 mm | 50 piece | 9068973 |
| blaugelb Assembly bracket 156.5 x 100 mm | 40 piece | 9069054 |
| blaugelb Assembly bracket 200 x 100 mm | 25 piece | 9069055 |
| blaugelb Assembly bracket 240 x 100 mm | 25 piece | 9069056 |
| blaugelb Frame screw Fix FK-T30 7.5 x 42 mm galv. | 100 piece | 0422310 |
| blaugelb Frame screw Fix FK-T30 7.5 x 62 mm galv. | 100 piece | 0422314 |

Mounting instructions:

To ensure proper, verifiable assembly (attachment), the following parameters must be borne in mind when planning and executing:


- Assessment of the construction situation
- Forces to be transmitted from construction elements, and the resulting effects
- Type of anchor bases (brickwork / concrete quality / wood strength), determining the choice of screw fastener, the screw-in depths and the necessary edge distances to the load-bearing edge of the anchor base
- Frame material of the construction element, size of the elements, determining the choice of screw fastener and their screw-in depths
- Height of the profiles to be linked, determining the choice of the appropriate bracket shank length
- Required joint widths, determining the free screw length
- Plan and execute possible sealing of the connecting joints, assembly brackets if necessary
- Documentation of test evidence showing how the forces being measured are absorbed in their effective direction
- Always mount the bracket with a closed profile contour in the direction of view
- The head diameter of the screw fasteners must always be greater than the hole diameter of the assembly bracket
- Avoid centres of rotation when assembling

Installation situation in front of the bearing wall

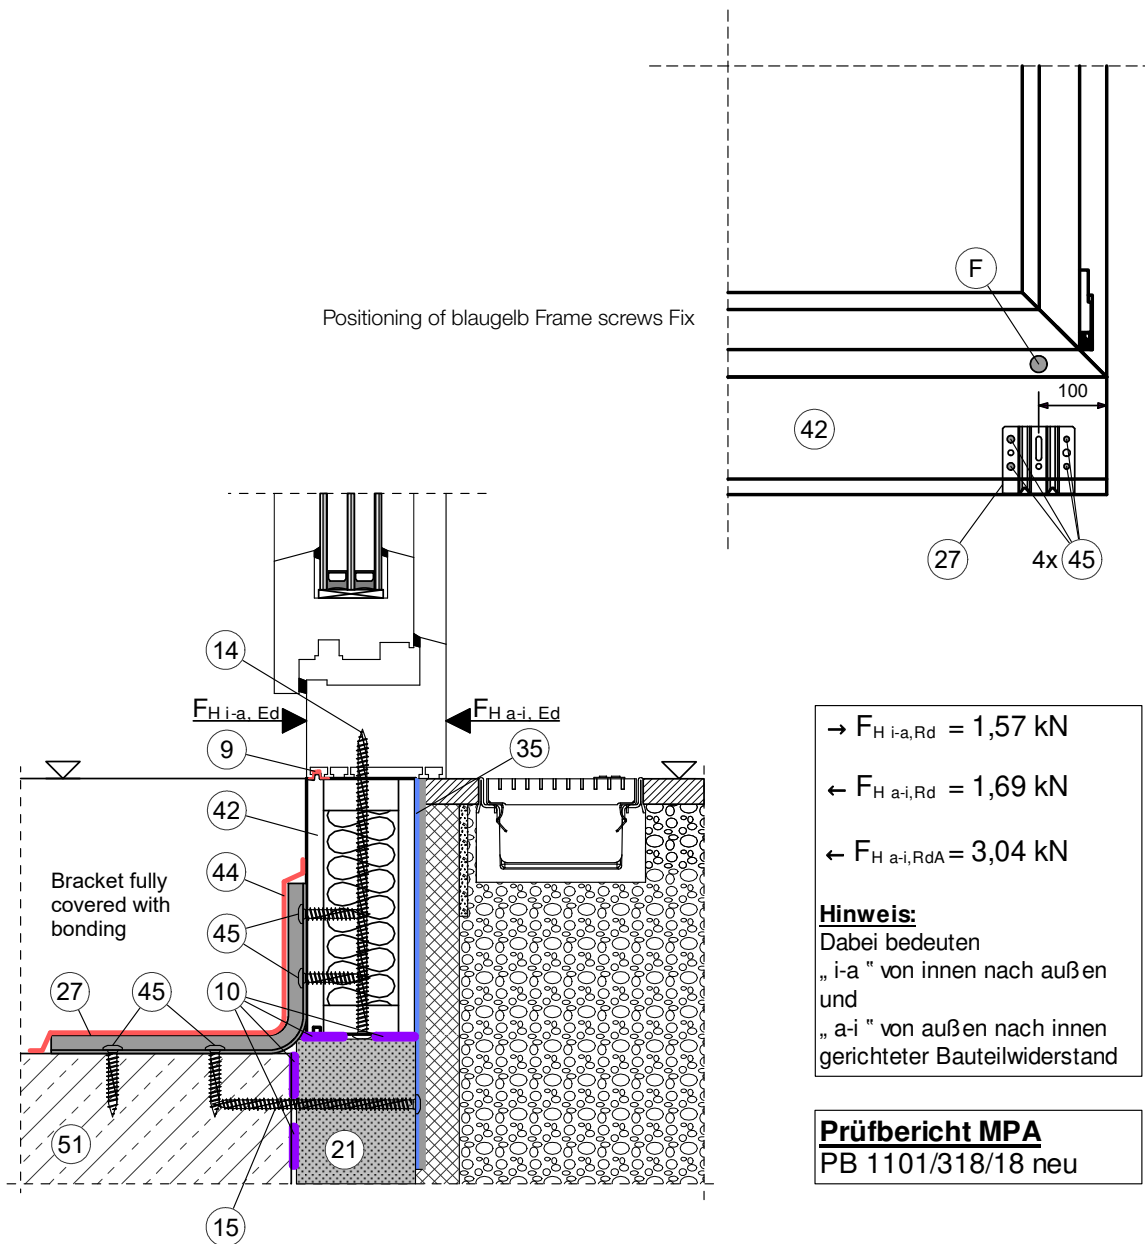

- | | |
|--|--|
| ⑨ blaugelb Hybrid Polymer Crystal | ③⑤ Sealant according to DIN 18533 |
| ⑩ blaugelb Hybrid Power Fix | ④② blaugelb Plinth Thermal Insulation Profile IHP / EPS |
| ⑭ blaugelb Frame screw Fix FK-T30 | ④④ blaugelb Foil Duo SL ¹⁰⁵⁰ Power One |
| ⑮ blaugelb Frame screw Fix FK-T30 | ④⑤ blaugelb Frame screw Fix FK-T30 7.5 x 42 mm |
| ⑰ blaugelb Triotherm+ Profile | ⑤① Load bearing wall construction (concrete) |
| ⑳ blaugelb Assembly bracket 156.5 x 100 mm, item no. 9069054 | ⑤② Point of static force |

Installation situation in the bearing wall

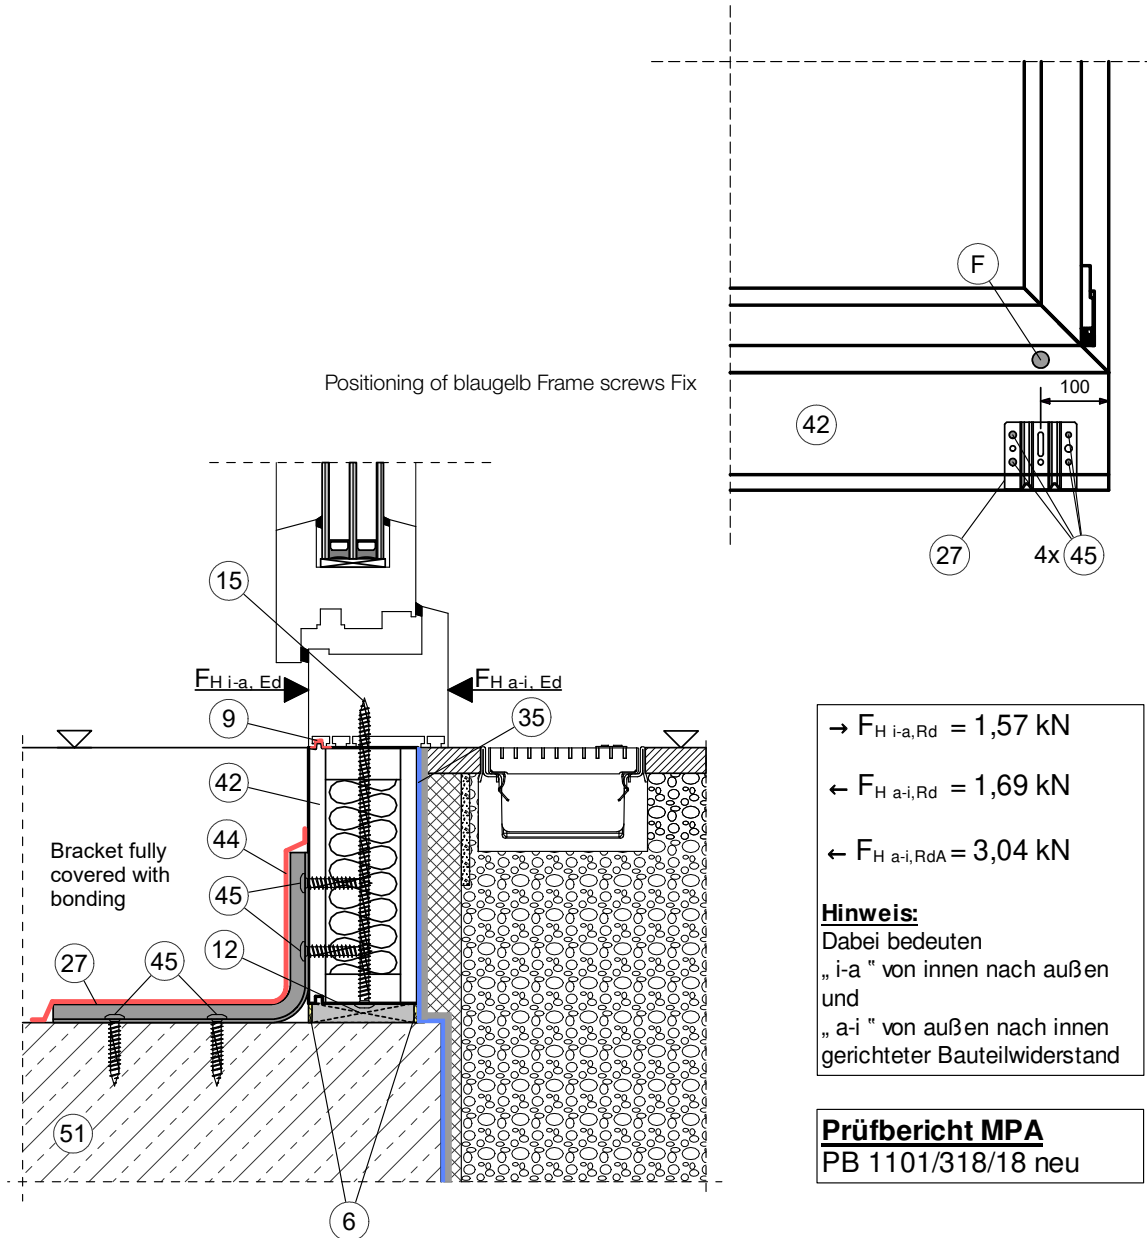

- | | |
|--|--|
| ⑥ blaugelb 1C Gun Foam Premium Allseason XXL Class E | ④② blaugelb Plinth Thermal Insulation Profile IHP / EPS |
| ⑨ blaugelb Hybrid Polymer Crystal | ④④ blaugelb Foil Duo SL ¹⁰⁵⁰ Power One |
| ⑫ blaugelb Spacer Block | ④⑤ blaugelb Frame screw Fix FK-T30 7.5 x 42 mm |
| ⑮ blaugelb Frame screw Fix FK-T30 | ⑤① Load bearing wall construction (concrete) |
| ⑳ blaugelb Assembly bracket 156.5 x 100 mm, item no. 9069054 | ⑤② Point of static force |
| ㉑ Sealant according to DIN 18533 | |