



## uPVC CLASSIC CLAD uPVC™

Classic Clad uPVC adds an aluminum shell to our classic uPVC line for a highly durable and beautiful exterior. Offering performance levels significantly higher than that of domestic windows but for a comparable price. A cost-effective solution for large-scale developments that require an aluminum clad exterior.

### PERFORMANCE

Frame Size = 88mm (3.46")

NFRC Values:

Fixed

U = 0.25 Btu/(h.ft<sup>2</sup>.F)

SHGC = up to 0.44

VT = 0.63

Condensation Resistance = 64

Operable

U = 0.26 Btu/(h.ft<sup>2</sup>.F)

SHGC = up to 0.37

VT = 0.53

Condensation Resistance = 64

### FINISH OPTIONS

White profiles inside and out

Exterior: RAL powder coated finish (matte) cladding.

Aluminum cladding applied to exterior only

### CONFIGURATIONS AVAILABLE

Fixed

Tilt-turn, Tilt-only, Turn-only, Tilt-first


Fixed/Operable combinations

French window opening

Inswing Entry Doors

### HARDWARE

European multi-point locking system with up to eight locking points on windows and four points on entry doors. Visible hinges are standard but concealed hinges are available.

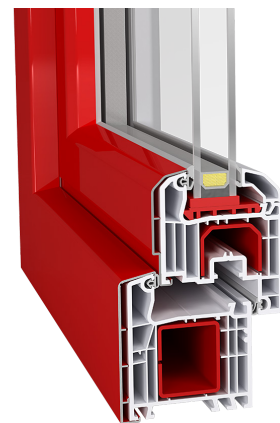

All performance data based on typical assemblies. Discuss specific performance values with a Zola Project Manager

Questions? Contact us for assistance at 303.578.0001