



uPVC CLASSIC uPVC™

Our most affordable line, Classic uPVC offers a substantial performance upgrade over standard vinyl or fiberglass alternatives at a lower cost. Perfect for multifamily buildings. Available in Tilt & Turn windows and swing doors. Steel-reinforced for durability and enhanced fit and finish.

PERFORMANCE

Frame Size = 88mm (3.46")

NFRC Values:

Fixed

U = 0.25 Btu/(h.ft².F)

SHGC = up to 0.44

VT = 0.63

Condensation Resistance = 64

Operable

U = 0.26 Btu/(h.ft².F)

SHGC = up to 0.37

VT = 0.53

Condensation Resistance = 64

STC / OITC Values:

STC upto 33

OITC upto 26

FINISH OPTIONS

White profiles inside and out

Color foil applied to inside, outside, and/or both

CONFIGURATIONS AVAILABLE

Fixed

Tilt-turn, Tilt-only, Turn-only, Tilt-first


Fixed/Operable combinations

French window opening

Inswing and Outswing Entry Doors

HARDWARE

European multi-point locking system with upto eight locking points on windows and four points on entry doors. Visible hinges are standard but concealed hinges are available.

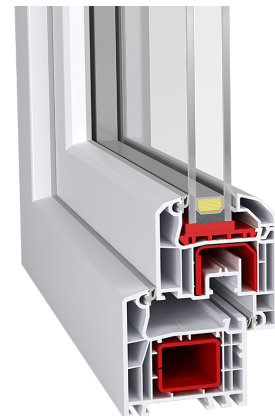

All performance data based on typical assemblies. Discuss specific performance values with a Zola Project Manager

Questions? Contact us for assistance at 303.578.0001