


TECHNICAL SPECIFICATION



Walkable skylight DXW DW6



I. APPLICATION

Installation	required roof pitch 0°-15°
	deck mounted

II. FEATURES

Frame structure	multi-chamber PVC profile
Glazing	DW6 - highly energy-efficient, toughened outer pane, laminated inner pane (class P2A)
Termination Bar	included aluminum profiles to secure roofing membrane into the skylight frame
Opening method	non-opening
Warranty	5 years for skylight

III. TECHNICAL PARAMETERS

Technical parameters	Unit	Value	Harmonised standards
U-factor for window	[BTU/h ft²F]	0.22	NFRC 100
U-factor for glazing unit	[BTU/h ft²F]	0.18	NFRC 100
SHGC	-	0.24	NFRC 200
Visible Transmittance factor	-	0.41	NFRC 200
Condensation Resistance	-	69	NFRC 500
Frame thermal insulation Uf	[BTU/h ft²F]	0.118	EN14351-1:2006+A2:2016
Wind load resistance	Class C5/B5		EN14351-1:2006+A2:2016
Impact resistance	Class 5 - 950 mm		

IV. OPTIONAL ACCESSORIES



Mounting accessories	- the XRD/W installation base allows raising the access roof light above the roof by 6". Maximum 3 bases can be joined.
External accessories	-
Internal accessories	- ARF/D, ARF/D Z-wave blackout blinds - APF/D pleated blinds

Features:

- suitable for roof pitches between 0-15 degrees
- enhanced load capacity of 102.5 pounds/sq.ft
- special non-slip coating to ensure complete safety when walking across
- quick and easy installation with profiles that clamp the covering material and facilitate the finish of the window connection with the roofing material
- frame is constructed of multi-chamber PVC profiles filled with insulation material and window comes with passive, double-chamber glazing unit with a U-value of 0.22 Btu/h ft²F

V. DIMENSIONS

Size		30" x 30"	30" x 36"	36" x 36"	36" x 48"	48" x 48"	
Rough opening (AxB)	in.	29 ⁷ / ₈ x 29 ⁷ / ₈	29 ⁷ / ₈ x 34 ³ / ₄	34 ³ / ₄ x 34 ³ / ₄	34 ³ / ₄ x 46 ⁵ / ₈	46 ⁵ / ₈ x 46 ⁵ / ₈	Other sizes are available on special order Max. possible size 48" x 48"
Outside frame (SxL)	in.	39 ¹ / ₄ x 39 ¹ / ₄	39 ¹ / ₄ x 44 ¹ / ₈	44 ¹ / ₈ x 44 ¹ / ₈	44 ¹ / ₈ x 55 ⁷ / ₈	55 ⁷ / ₈ x 55 ⁷ / ₈	

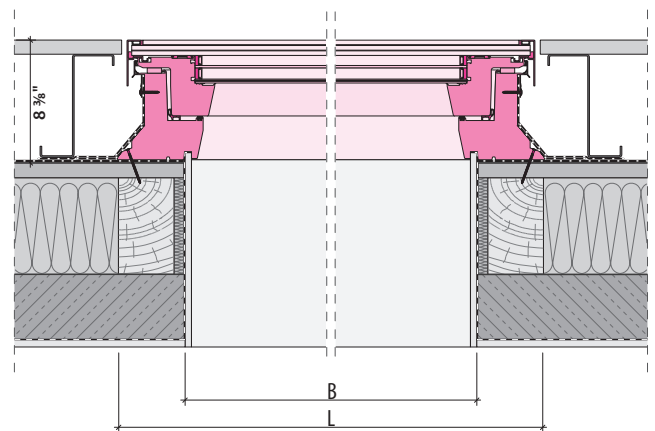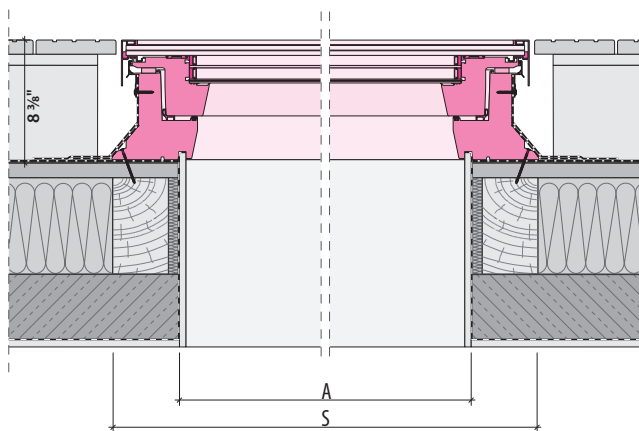

FAKRO America LLC
39 W. Factory Road, Addison, IL
Ph: 630-543-1010 / office@fakrousa.com